





EVERUN ER28 WHEEL LOADER 4WD



Standard Configuration

Standard Bucket, Hydraulic Torque Converter Transmission, Floating Function, Hydraulic Joystick, 130W Heater 220V Engine Heater, Rops&Fops Cabin, Quick Hitch, Luxury Cabin Inside, Backward Imagine, Comfortable Seat Adjustable Steering Wheel, Wheel Reducer Axle, Air Brake, Lock for Lifting and Steering Cylinder, Hydraulic Pressure Check System, Parallel Linkage, 17.5-25 Tire, Free Service Spare Parts etc.

Optional Configuration

Electric Joystick, Air conditioner, Extra Hydraulic Line, LED Light, E4 Lamp, Varta Anti-Freeze Battery, Tyre Chain Three-Point Hitch, Loading Damper, Centralized Lubrication System, Loader Weighter, 5 Functions Electric Joystick, Cummins QSF3.8 Engine(Euro3), Different Attachments.

Technical Parameter

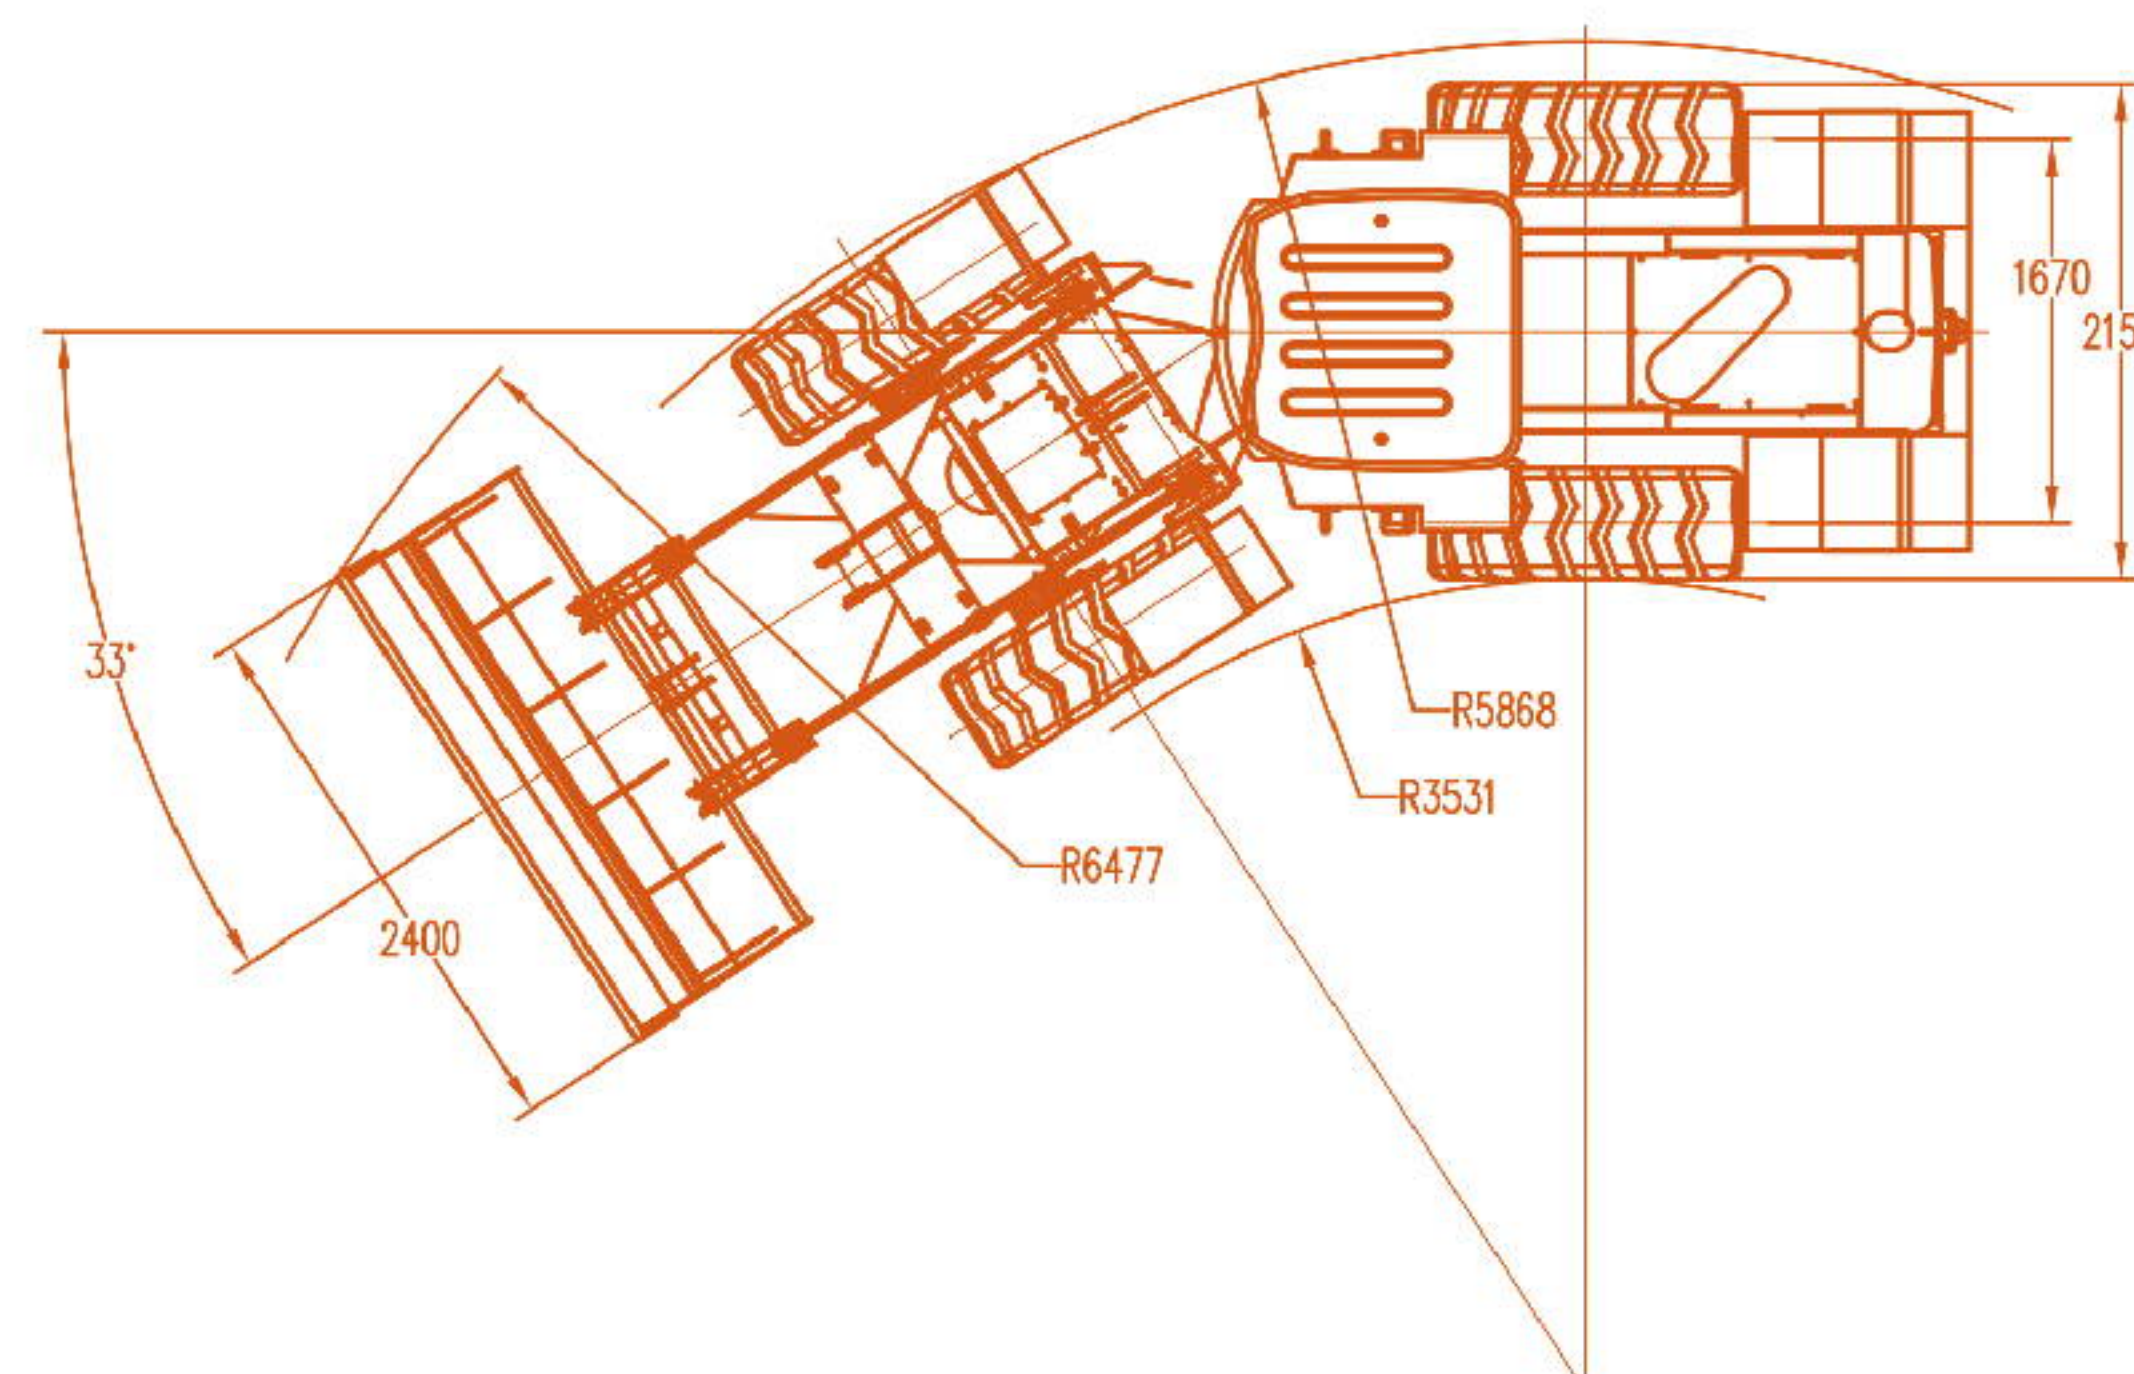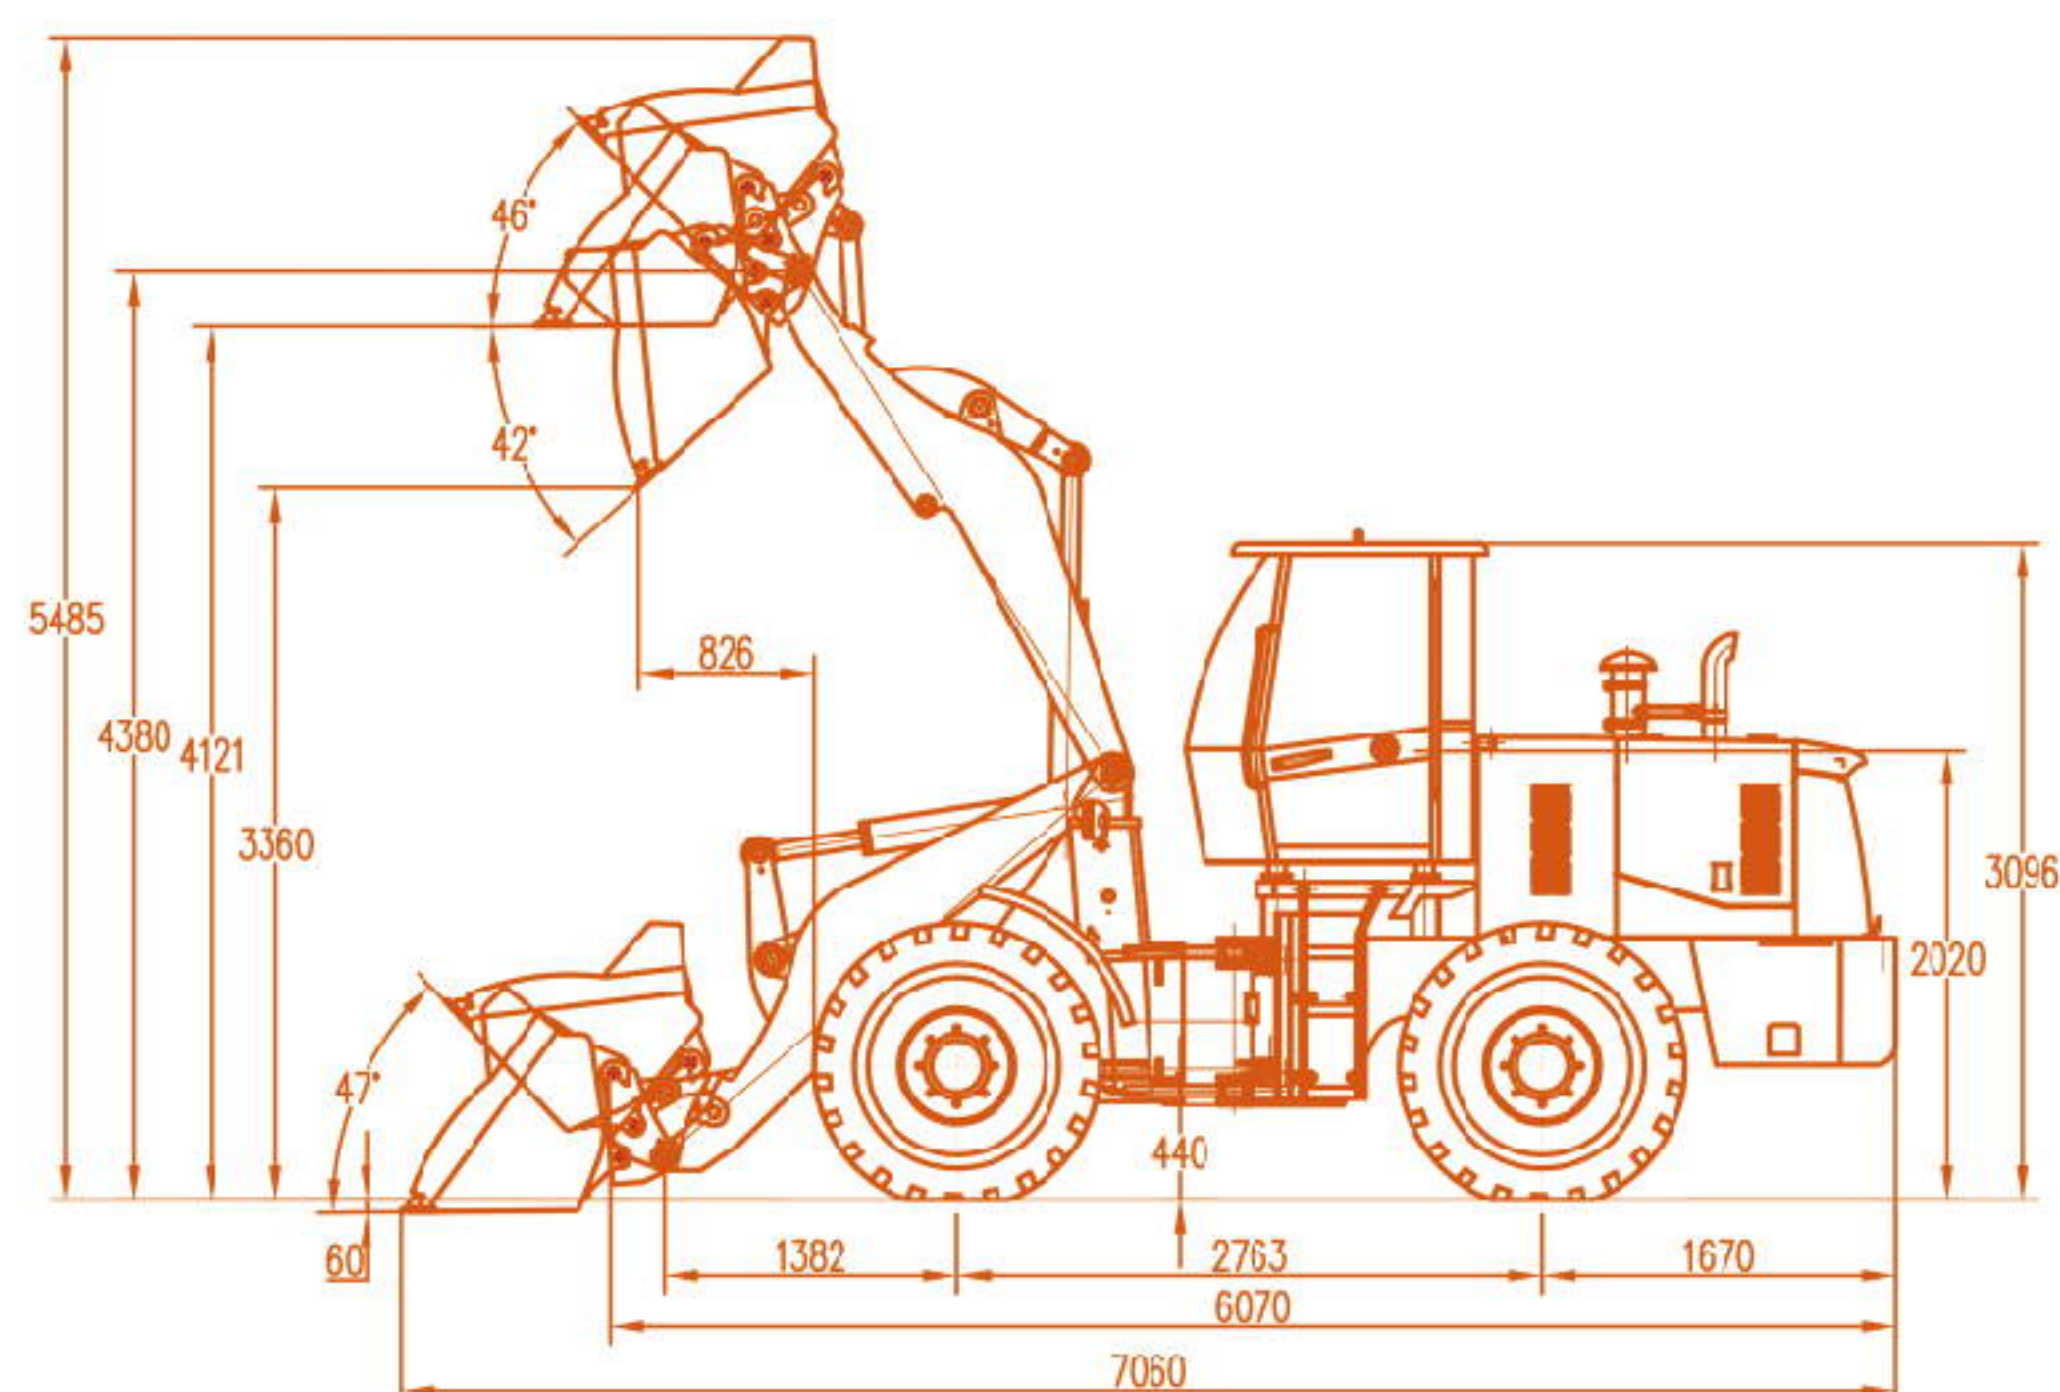

Bucket Capacity	1.6 m3	Net Weight	8000kg
Loading Capacity	2800kg	Lifting Time	7s
Max. Driving Speed(I/II)	3536km/h	Working Pressure	16mpa
Fuel Consumption Ration	210g/km·h	Wheel Base	2763mm
Engine Model	Weichai WP6G125E22	Breakout Force	65kn
Engine Power	92kw	Tyre	17.5-25
Service Brake	Air Assist Disc Brake On 4 Wheels	Oil Flow	150L/min
		Rated Speed	2200r/min

Qingdao Everun Machinery Co.,Ltd

Address : Room 902, Yongxin International Finance Centre
No.6 Qinling Road, Qingdao, China

Tel : +86-532-80997859

Website: www.everun.cc

▶▶▶  : www.everun.com

Email : info@everun.cc

Fax: +86-532-80993178

