





EVERUN ER416 WHEEL LOADER 4WD



Standard Configuration

Standard Bucket, Engine(Euro3 Engine), Torque Converter Transmission System, Rops & Fops Cabin, Electric Joystick, Quick Hitch, Floating Function, Tipping Cabin, Adjustable Steering Wheel, Comfortable seat, Cabin Heater Backward Camera, Hydraulic-Pressure Checking System, Engine Heater, Wheel-Reducer Axle, Air Brake 23.5/70-16 Agricultural Tyres, Lock For Lifting and Steering Cylinder, Parallel Linkage System, Free Service Spare Parts.

Optional Configuration

Hydraulic Line, LED Light, E4 Lamp, Varta Anti-Freeze Battery, 315/80 R22.5 Snow Tyres, Tyre Chain, Three-Point Hitch, Loading Damper, Centralized Lubrication System, Loader Weighter, 5 Functions Electric Joystick, Kohler 1903TCR Engine(EPA4), Cummins QSF2.8 Engine(EPA4), Yanmar 4TNV94L Engine(Euro3), Air Conditioner, Different Attachments.

Technical Parameter

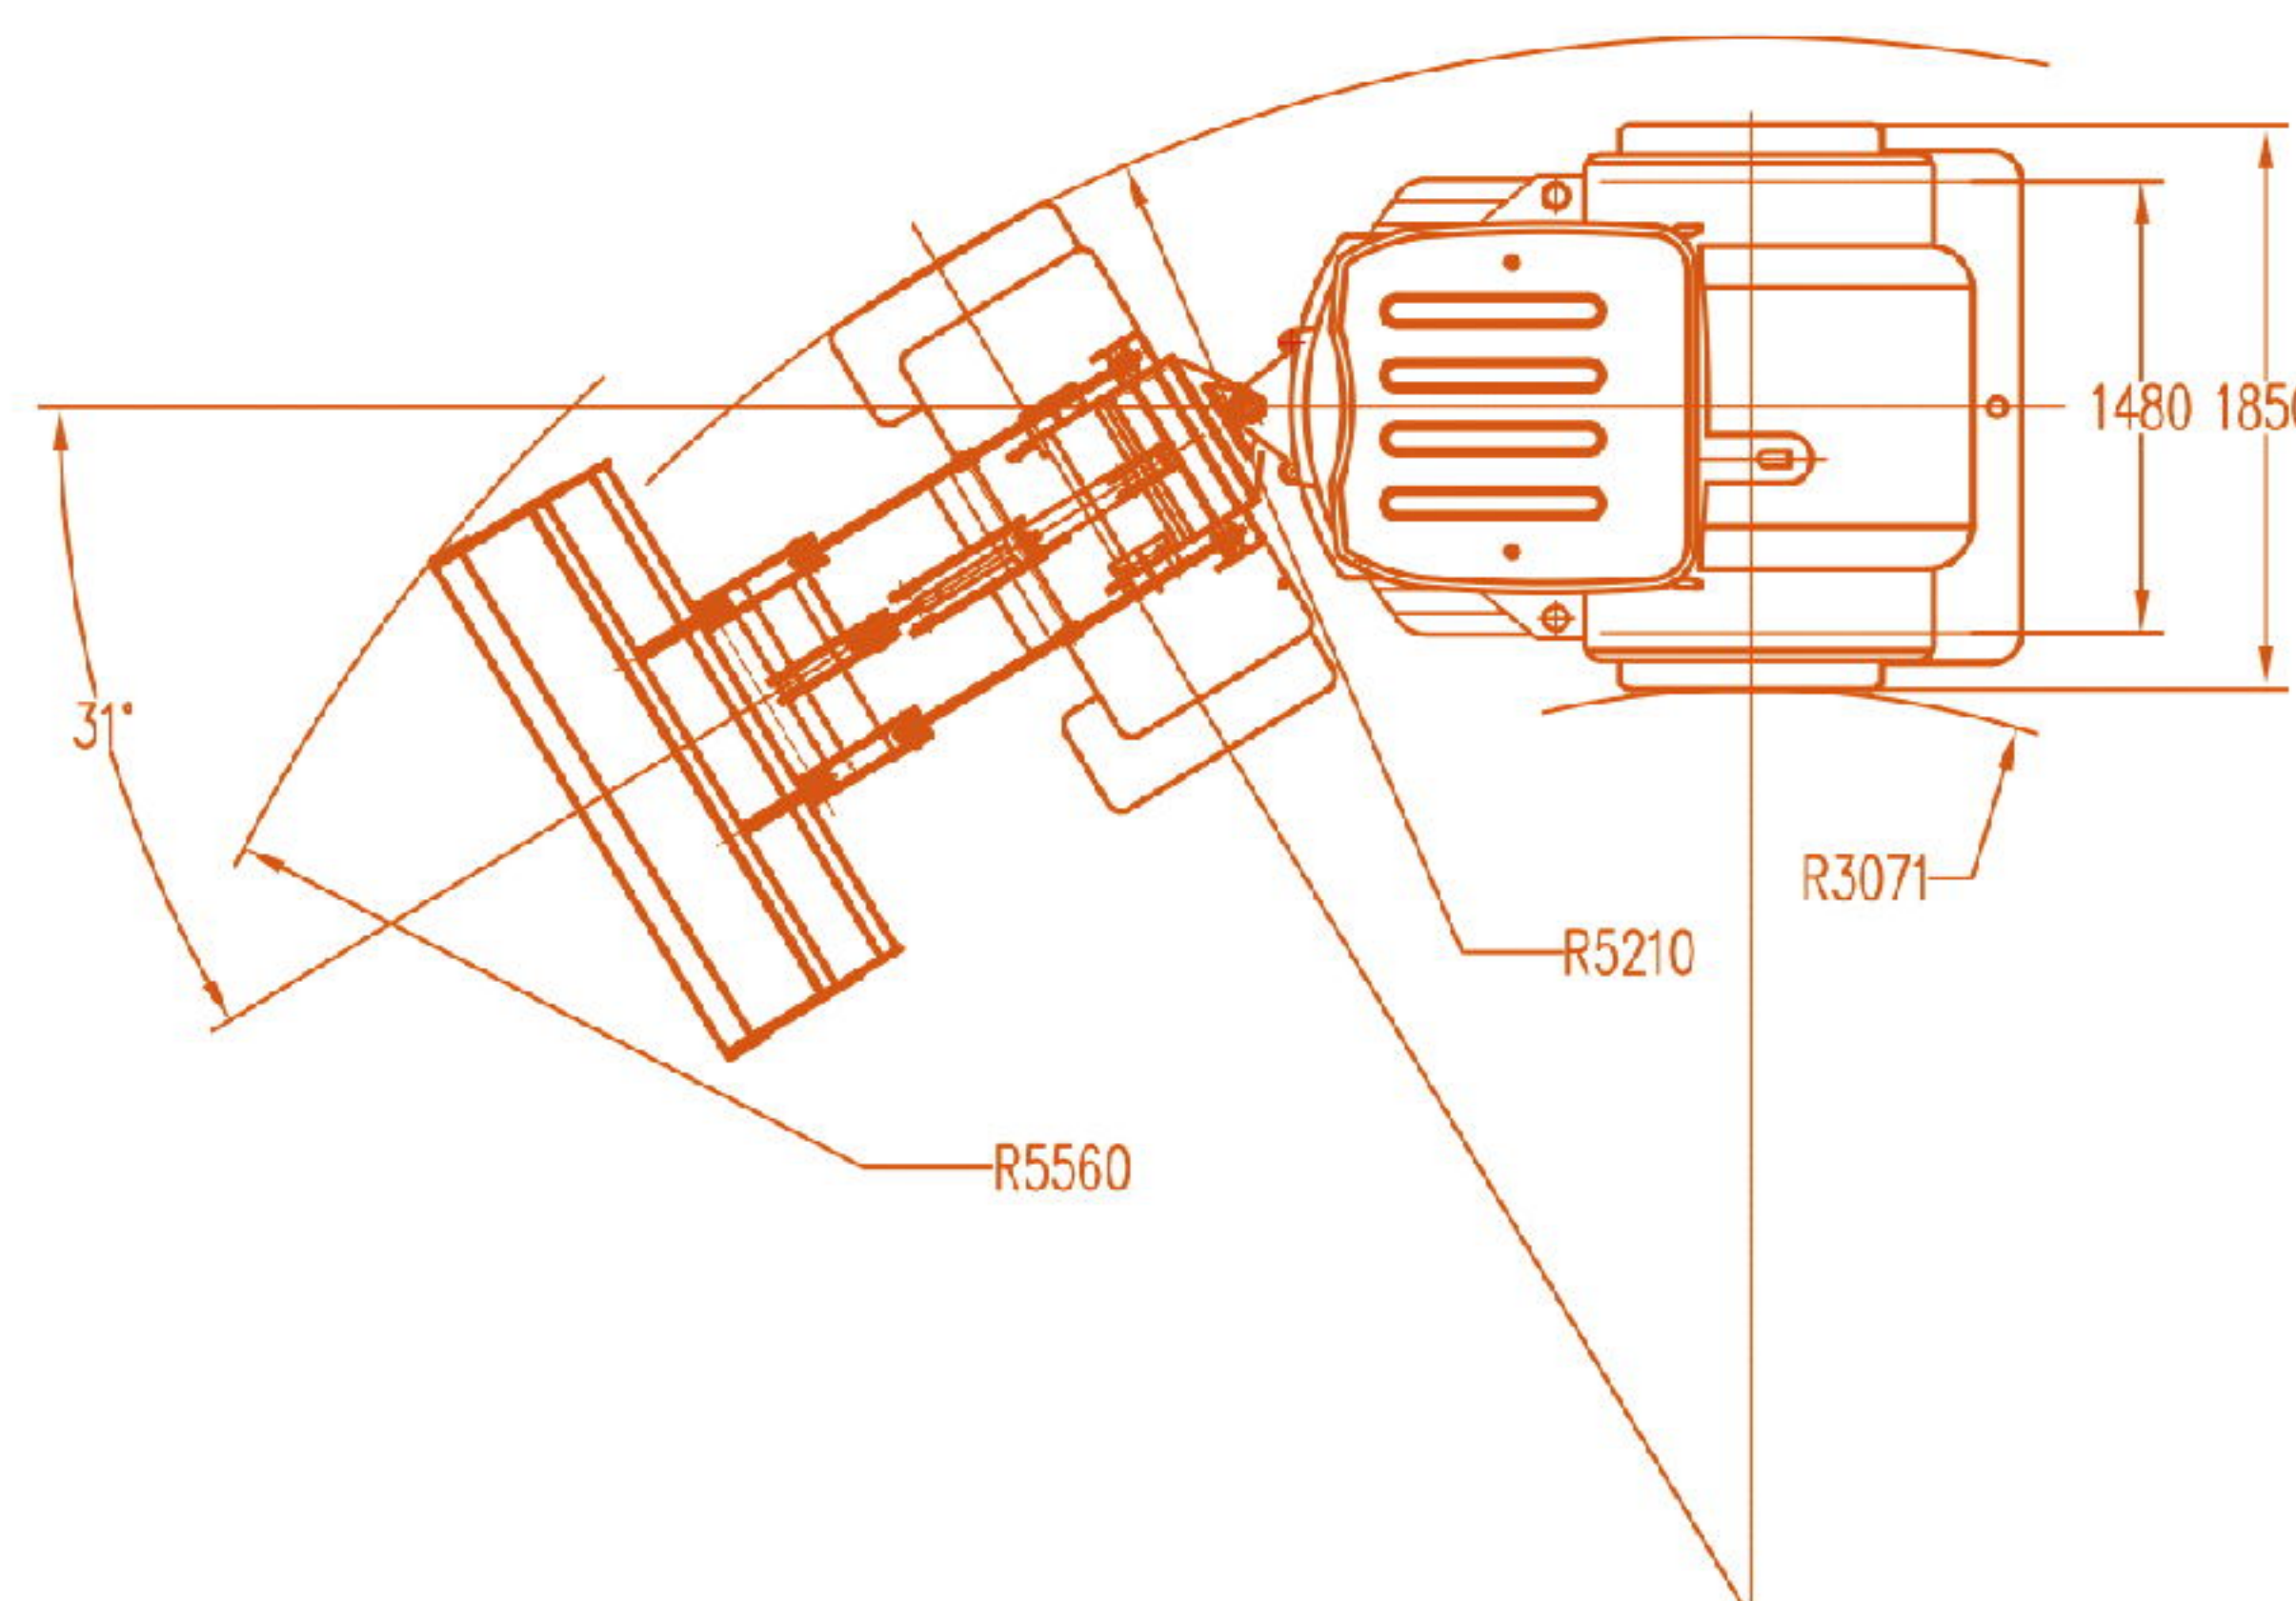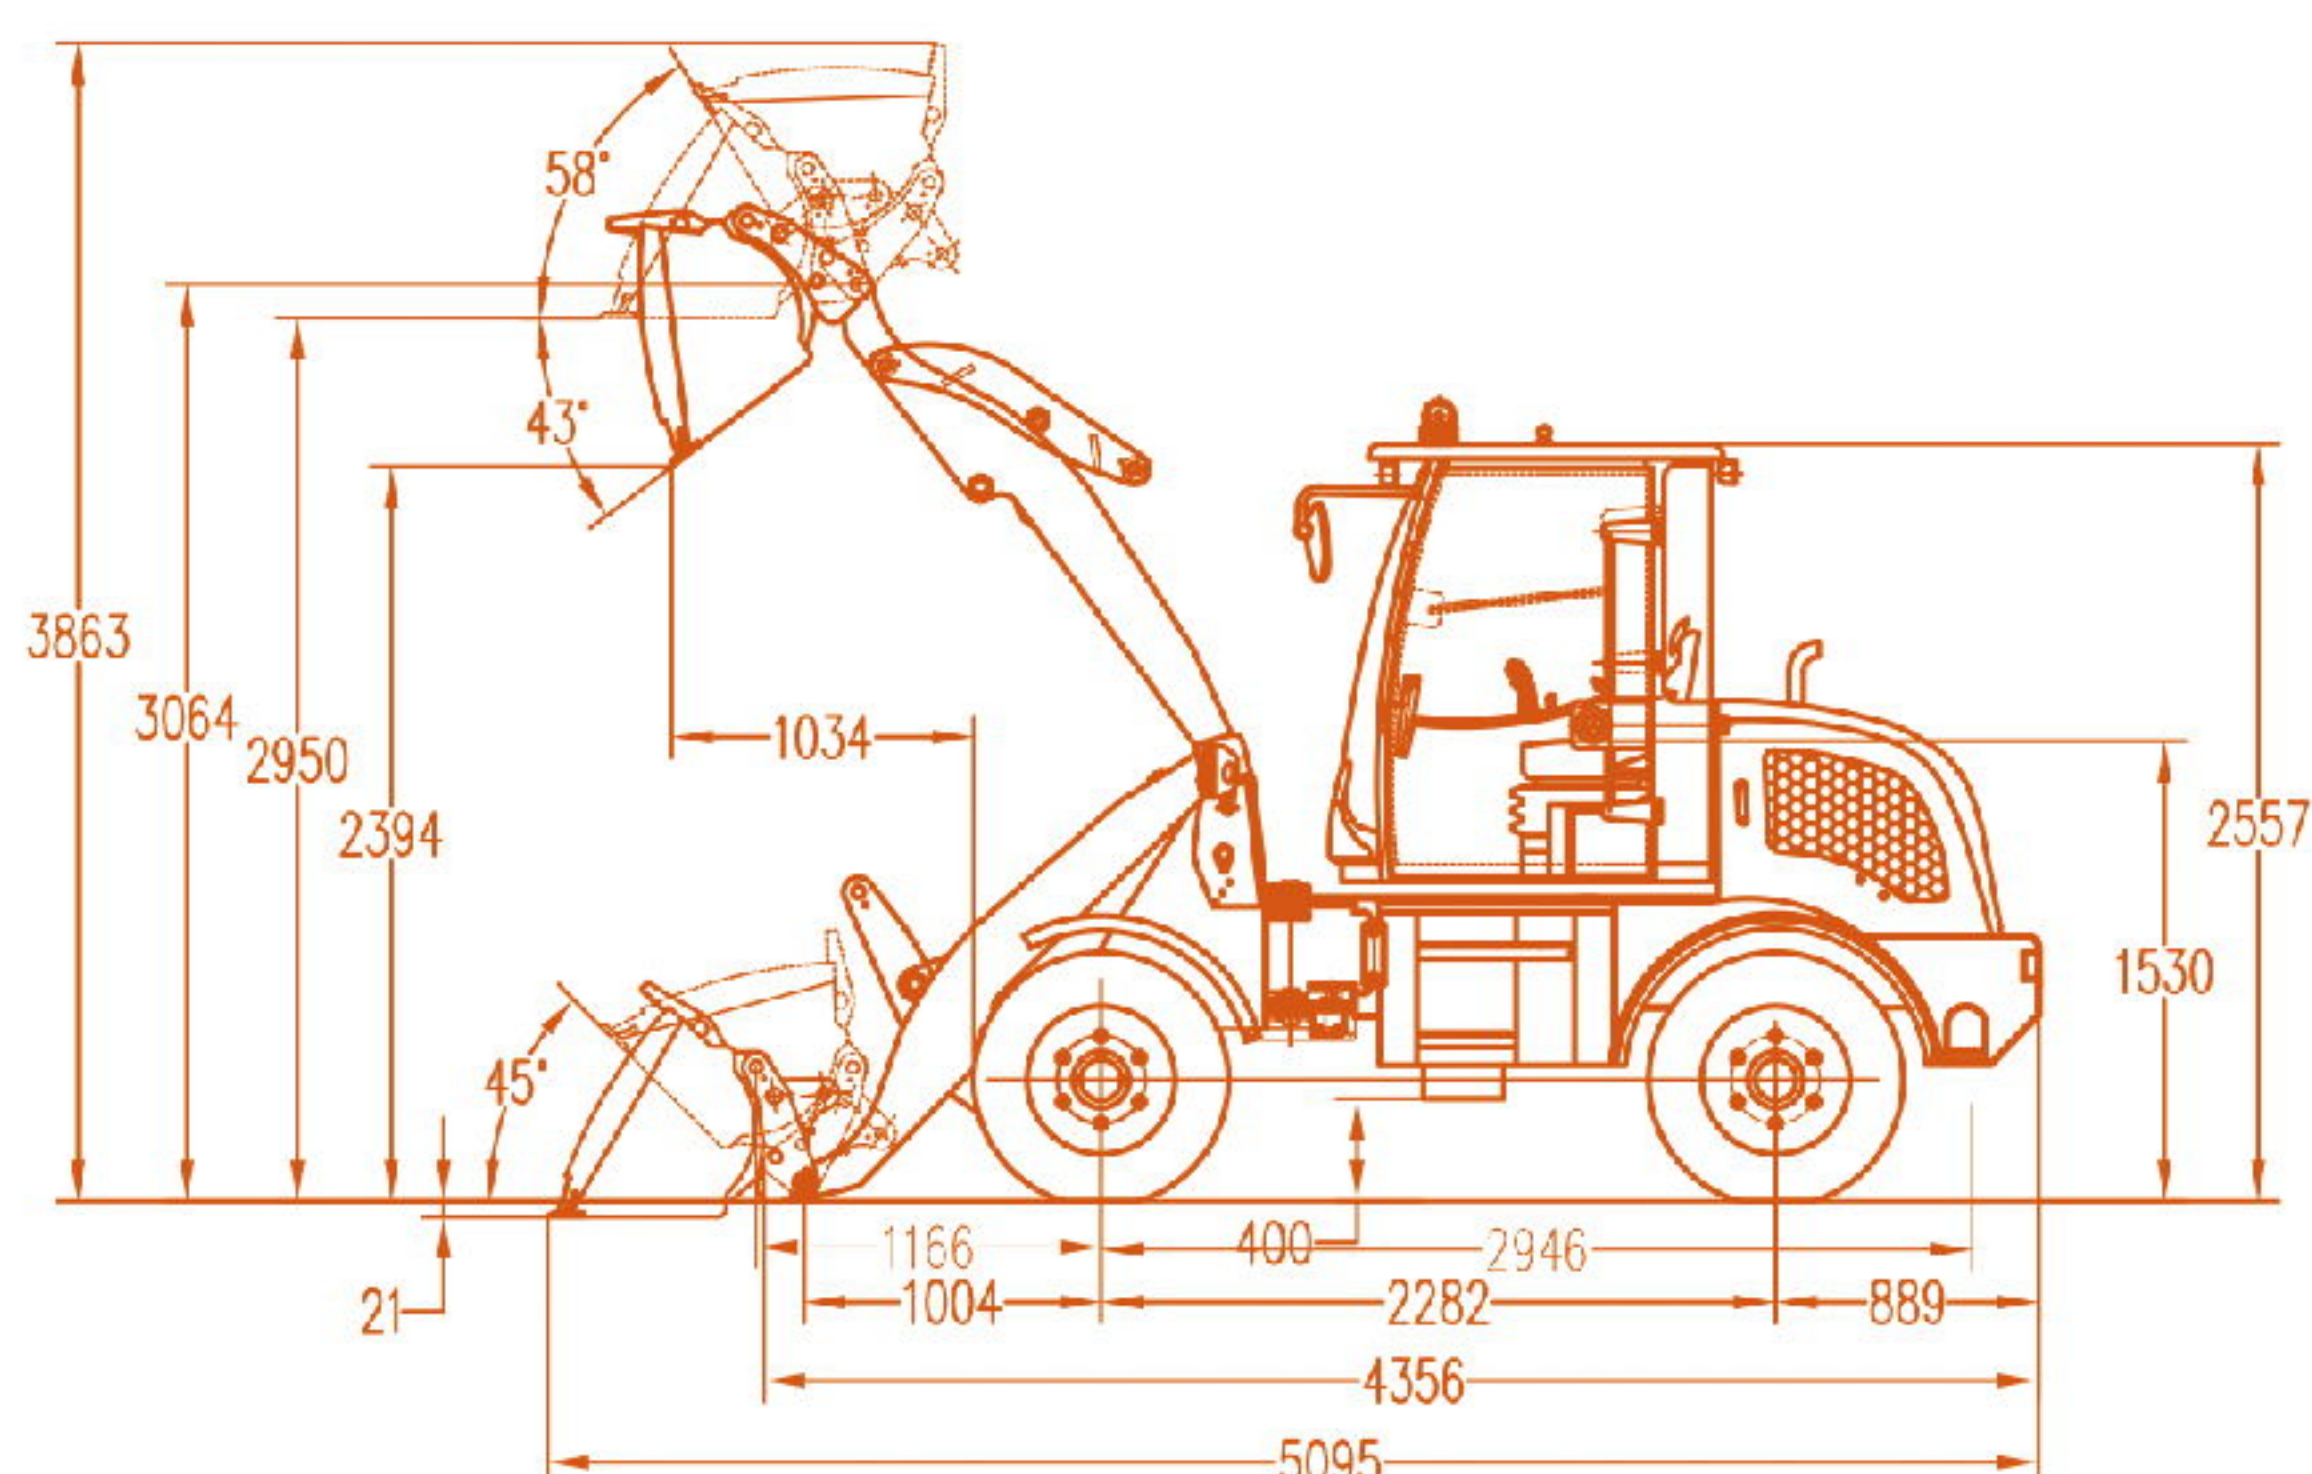

Bucket Capacity	0.64m ³
Loading Capacity	1600kg
Max. Driving Speed(I/II)	8/19km/h
Fuel Consumption Ration	238g/km·h
Engine Model	XinChai 498
Engine Power	36.8kw
Service Brake	Air Over Hydraulic Disc Brake On Four Wheels

Net Weight	3800kg
Lifting Time	7s
Working Pressure	17mpa
Wheel Base	2282mm
Breakout Force	28kn
Tyre	23.5/70-16
Oil Flow	72L/min
Rated Speed	2400r/min

Qingdao Everun Machinery Co.,Ltd

Address : Room 902, Yongxin International Finance Centre
No.6 Qinling Road, Qingdao, China

Tel : +86-532-80997859

Website: www.everun.cc

▶▶▶▶ (New) : www.everun.com

Email : info@everun.cc

Fax: +86-532-80993178

